

EASY LINE

EL1615, EL1715, EL1638, EL1738








polysan 

Polysan s.r.o.
Nesměřice 52
285 22 Zruč nad Sázavou
www.polysan.net




silicone




X1

A




X1

B




X2

C



X1


D



long

X1

E



short

X1

F



ST4*10


X2

T




X1

H




X1

I




X1

J




X4

K



X2


L



ST4*30

X8


M



ST4*8


X4

N



X8

O




X8

P




X8


Q

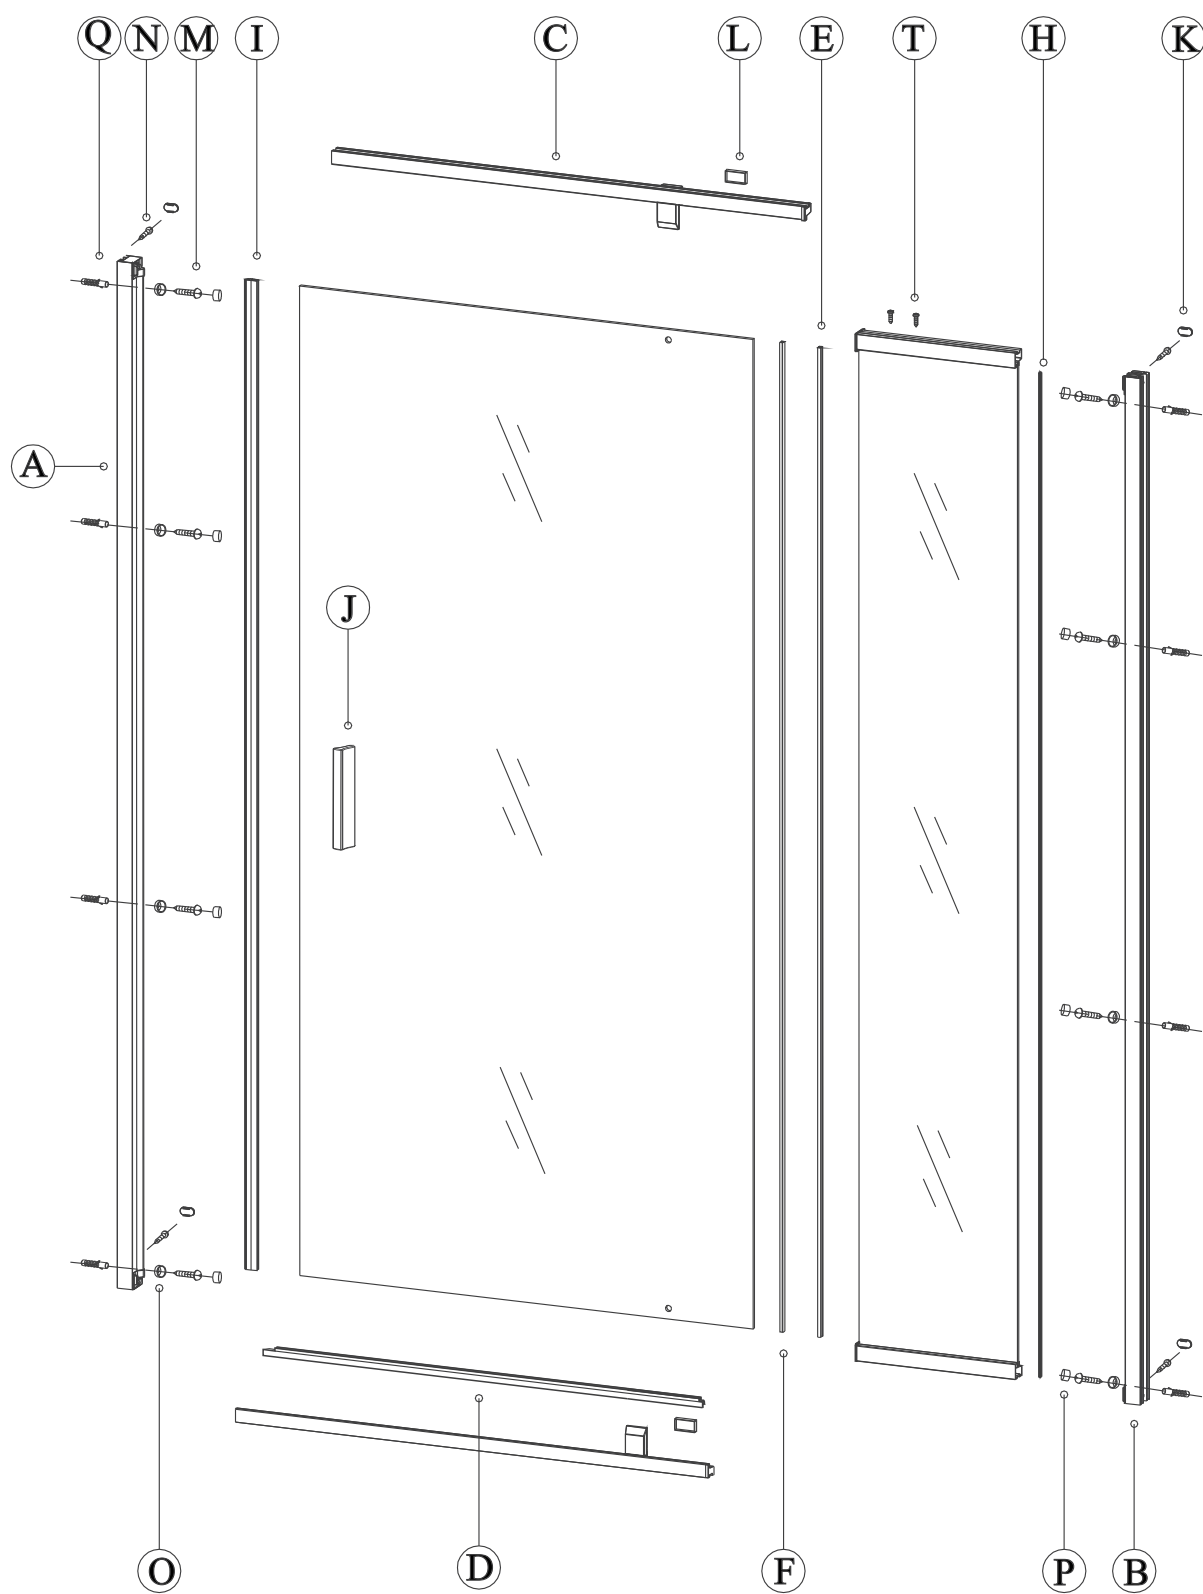


1

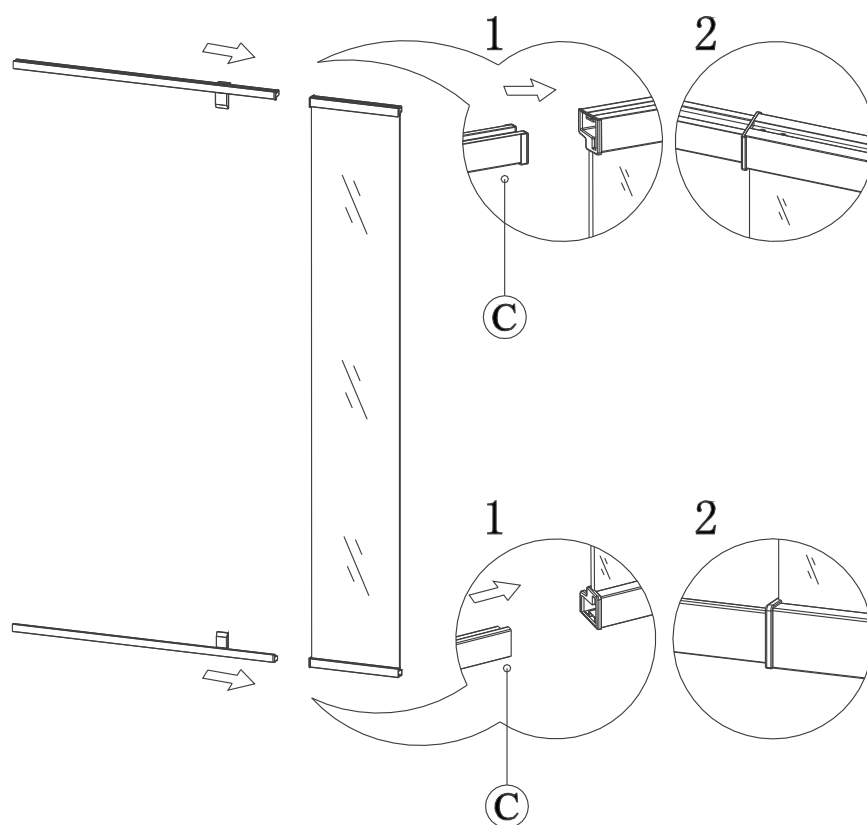






2

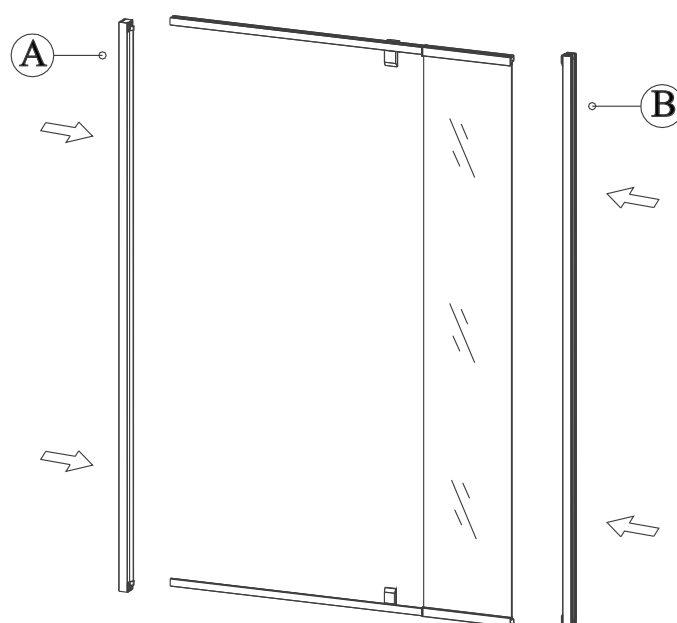


3

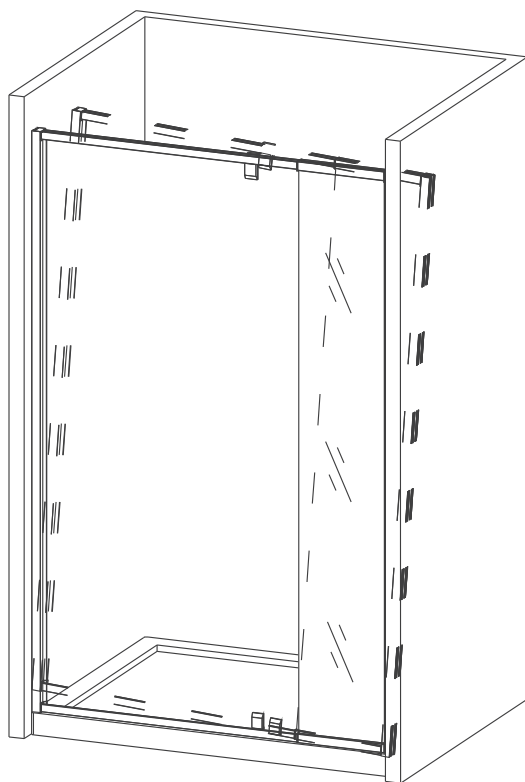


4

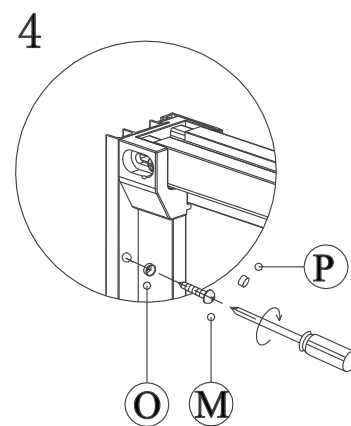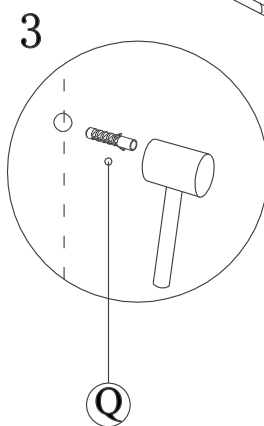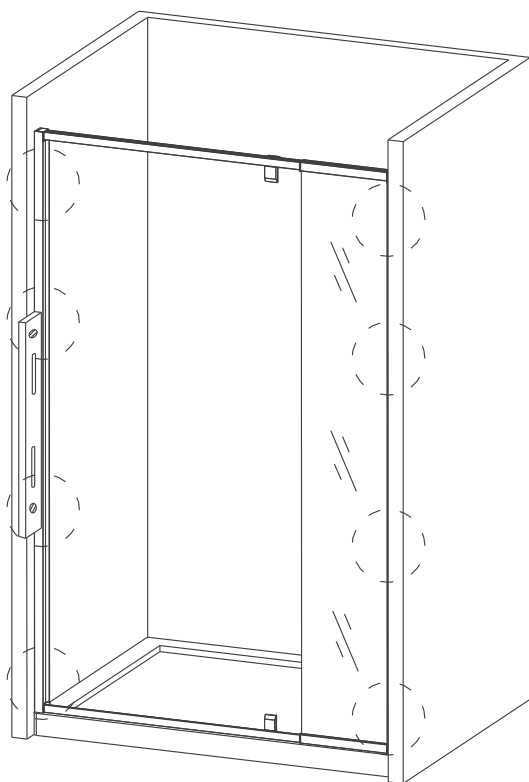


5

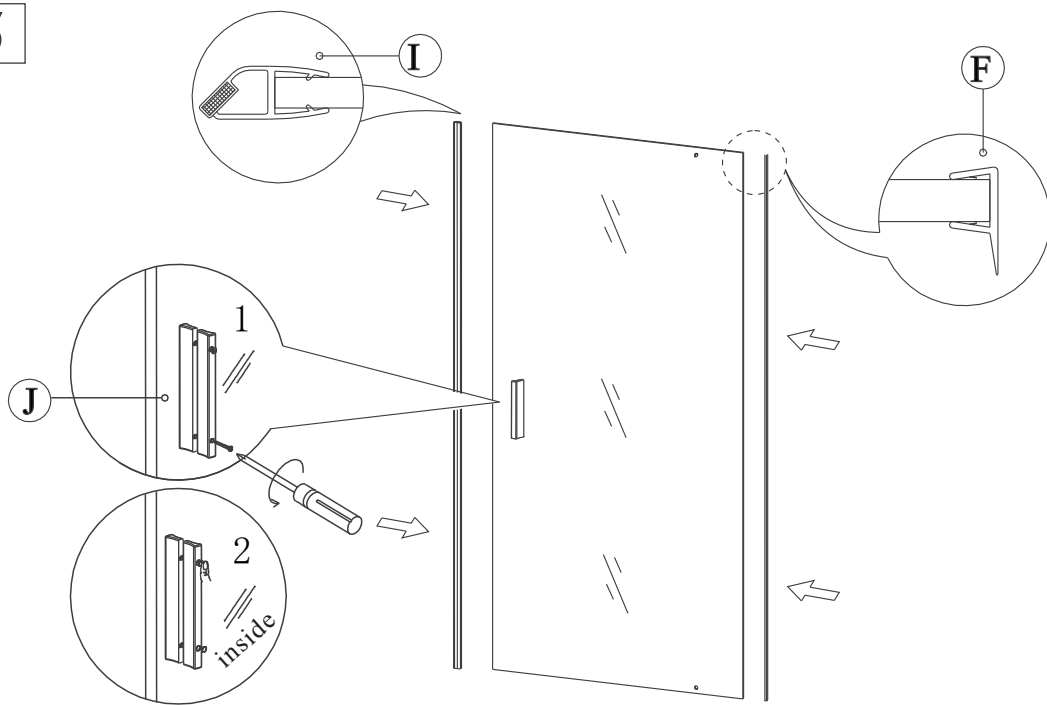


6

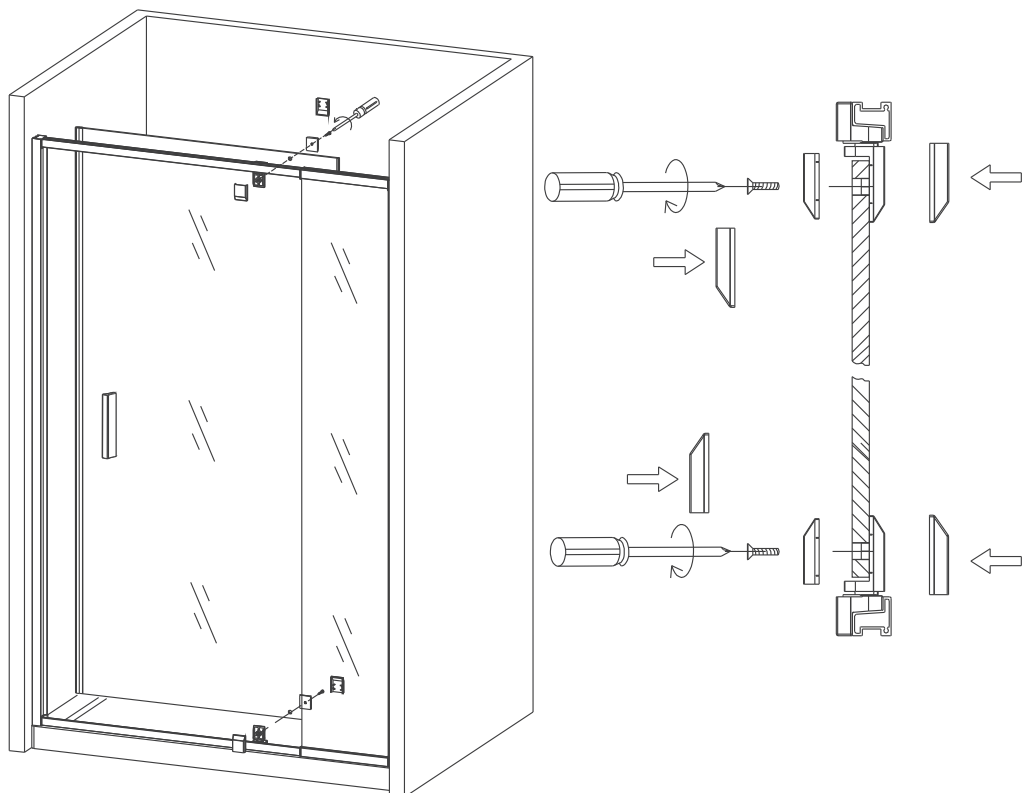

7

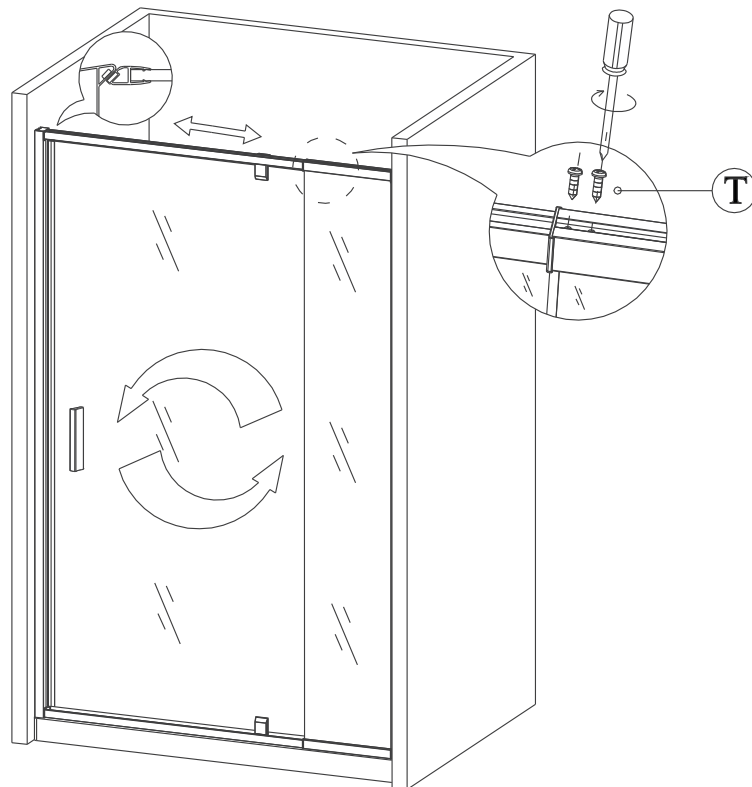

8

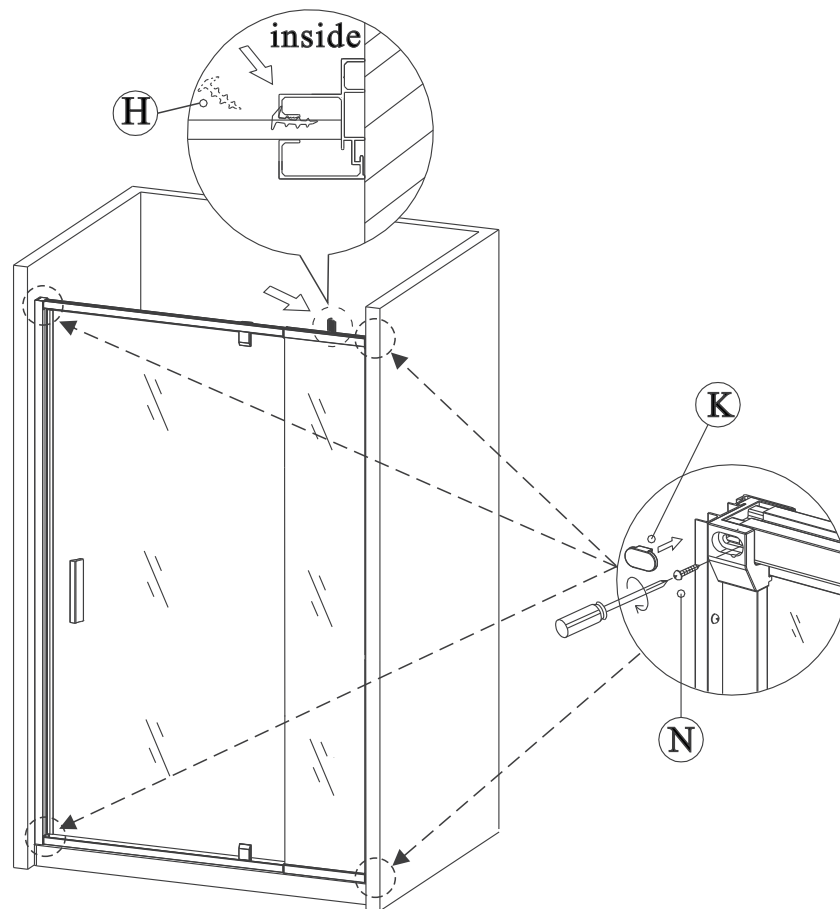

9

D

1

2

3

E

F

inside


inside

11




MATCH WITH SIDE PANEL


12

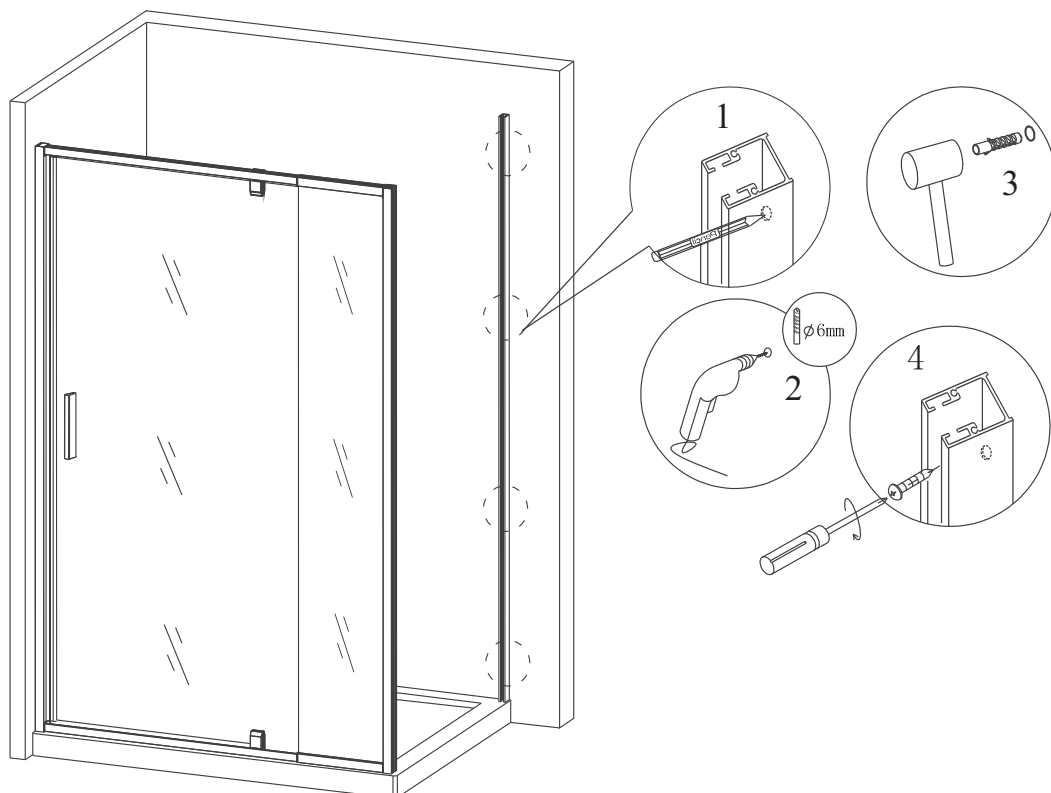


13

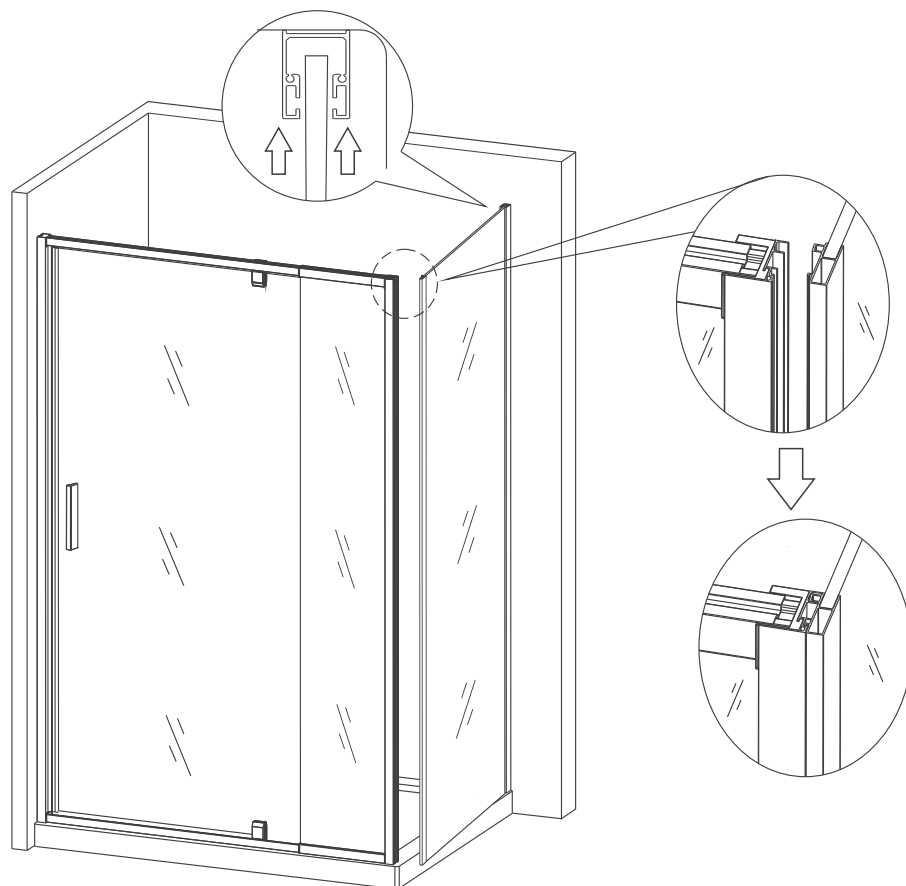


14

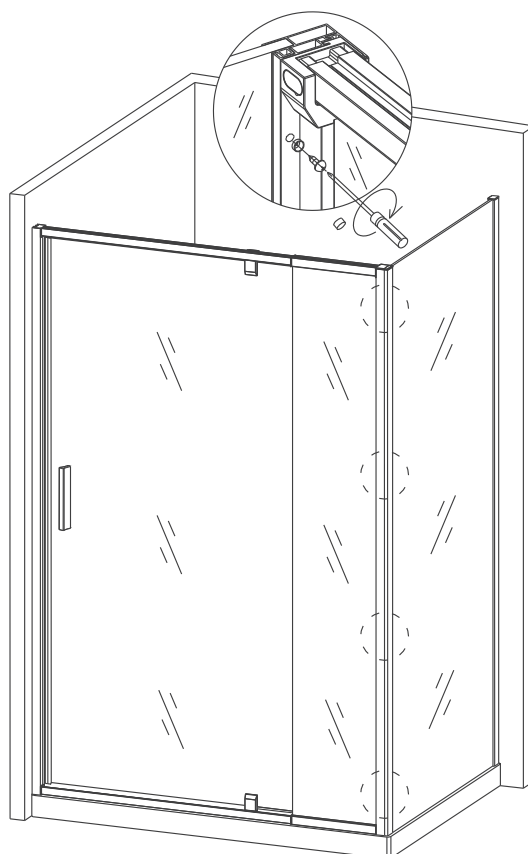

15

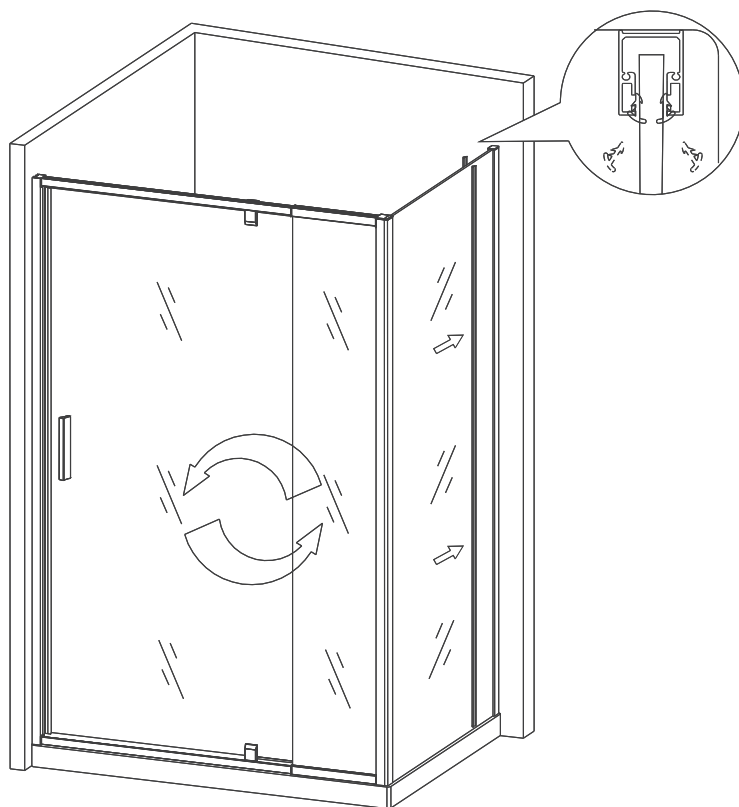

16

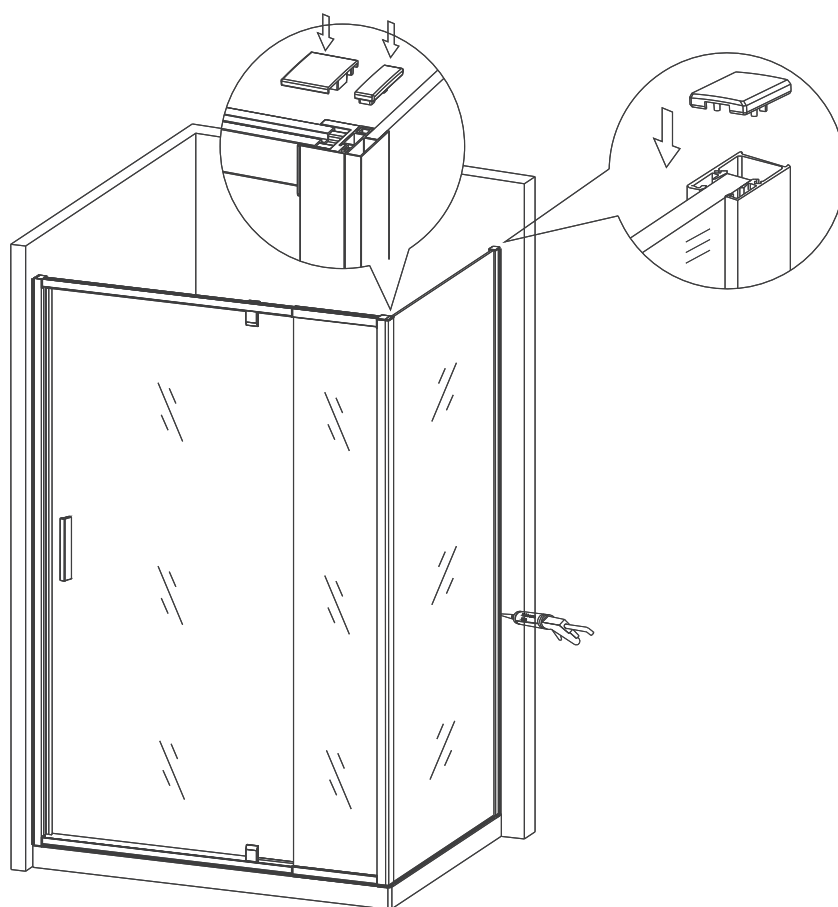



Polysan s.r.o.
Nesměřice 52
285 22 Zruč nad Sázavou
Czech Republic
www.polysan.net

EN 14428

Glass shower enclosure
cleaning efficiency: conforming
impact resistance: conforming
operating life: conforming

Skleněné sprchové zástěny
schopnost čištění: vyhovuje
odolnost proti nárazu: vyhovuje
životnost: vyhovuje